



Version  
01.00

May  
2005

## Spectrum Analyzer R&S®FSL

High-end functions in an extremely light, compact package

- ◆ Frequency range 9 kHz to 3/6 GHz, with and without tracking generator
- ◆ I/Q demodulation bandwidth 20 MHz
- ◆ DANL -152 dBm(1 Hz)
- ◆ Total measurement uncertainty <0.5 dB
- ◆ Low weight – under 8 kg/18 lbs
- ◆ Internal battery option with typ. 1 h operating time
- ◆ Extensive measurement routines such as TOI, OBW, time domain power, channel/adjacent channel power

You no longer have to make compromises when buying a spectrum analyzer. You can now get high-end features without stretching your budget – the R&S®FSL.


The R&S FSL is an extremely lightweight and compact spectrum analyzer that is ideal for a large number of applications in development, service and production. Despite its compact size, it offers a wealth of functions more typical of the high-end range, thus ensuring an excellent price/performance ratio. The R&S®FSL is the only instrument in its class that features a tracking generator up to 6 GHz and can I/Q-demodulate signals with a bandwidth of 20 MHz.

Model overview	Frequency range	Tracking generator
R&S®FSL3, model .03	9 kHz to 3 GHz	no
R&S®FSL3, model .13	9 kHz to 3 GHz	1 MHz to 3 GHz
R&S®FSL6, model .06	9 kHz to 6 GHz	no
R&S®FSL6, model .16	9 kHz to 6 GHz	1 MHz to 6 GHz

The high-end approach is also evident in the operating features. As with the R&S®FSP and R&S®FSU, the main functions of the R&S®FSL are directly accessible by fixed-assignment function keys, with additional functions accessed using softkeys and tables. This shortens the learning curve for new users.

Its compact size and low weight, plus its optional battery pack, make the R&S®FSL ideal for mobile use.

The R&S®FSL has unique plug & play upgrade abilities. All options can be added without opening the instrument.

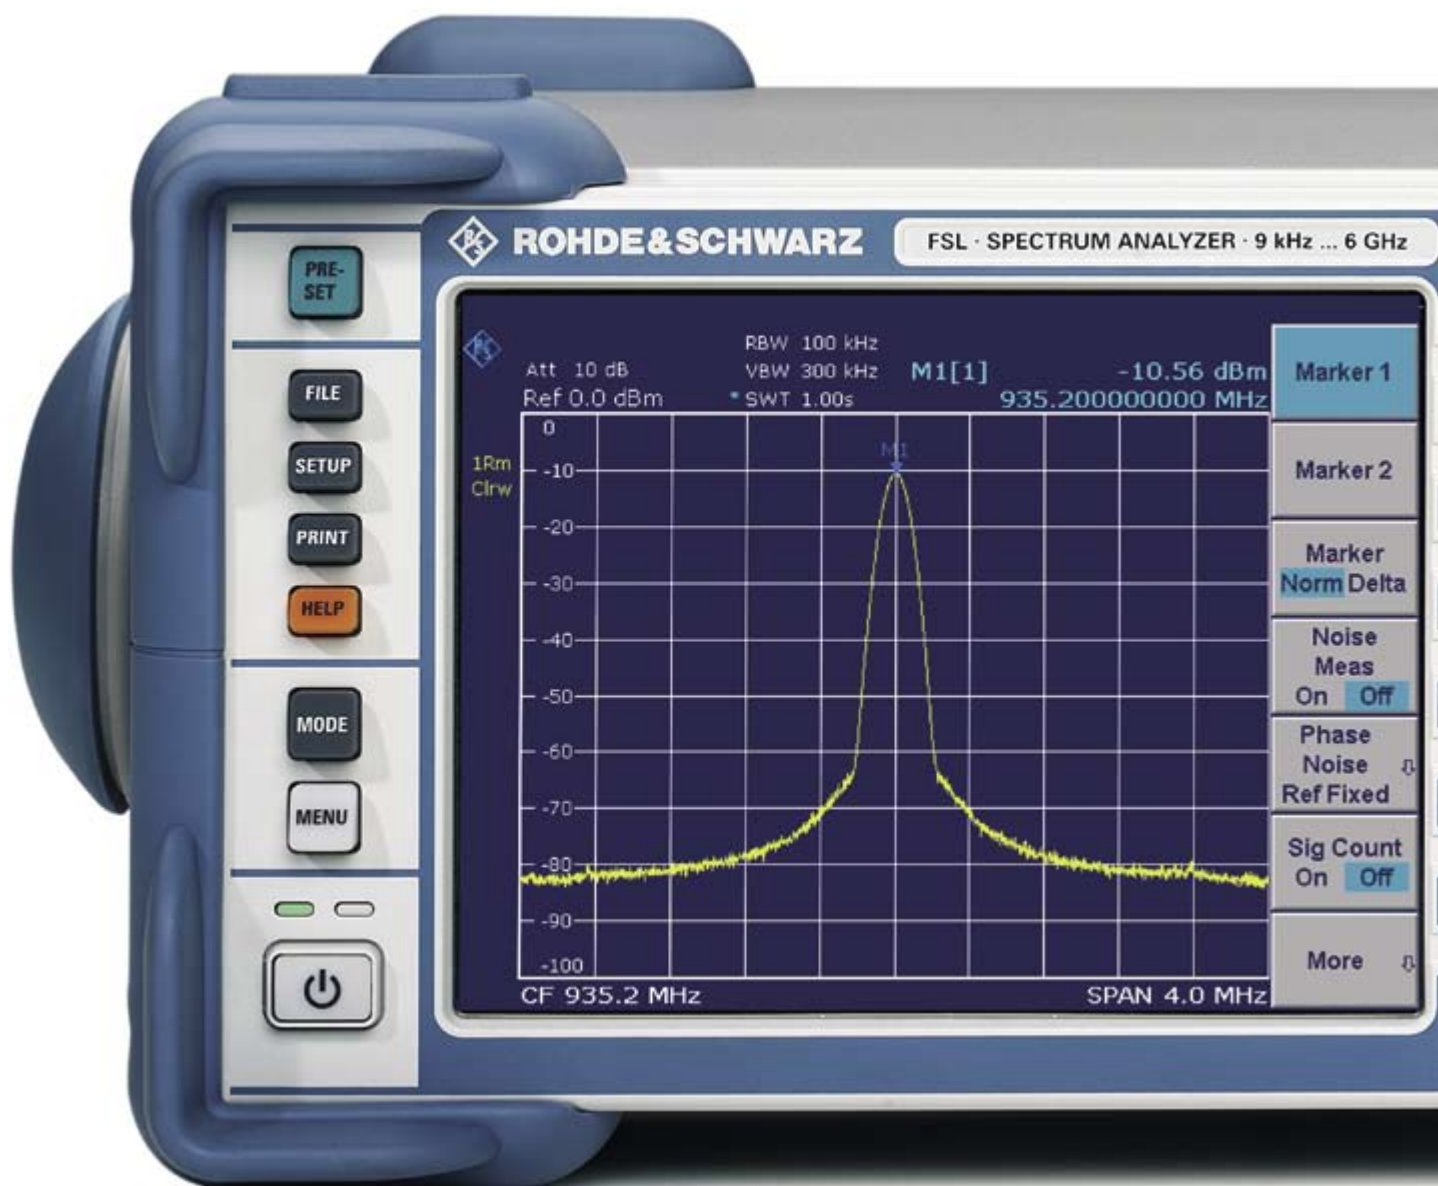

## Main characteristics

- ◆ Best RF characteristics in its class
- ◆ Largest I/Q demodulation bandwidth in its class
- ◆ High measurement accuracy
- ◆ High resolution filter accuracy owing to all-digital implementation
- ◆ Robust and compact
- ◆ Carrying handle and low weight (<8 kg/18 lbs) for mobile use
- ◆ Optional battery operation
- ◆ Wide range of functions, simple operation
- ◆ Easy on-site upgradeability



*The compact size of the R&S FSL is illustrated by this nearly-to-scale picture. Yet the R&S® FSL is a full-featured analyzer with the widest range of functions and the best RF characteristics in its class.*



# Exceptional performance for its class

FSL · SPECTRUM ANALYZER · 9 kHz ... 6 GHz

With phase noise of typ.  $-103$  dBc (1 Hz) at 10 kHz from the carrier, a third order intercept point of typ.  $+15$  dBm, a bandwidth range from 10 Hz to 10 MHz, and a displayed average noise level (DANL) of  $-152$  dBm, the R&S®FSL compares favorably with high-end analyzers. This makes it very useful in production, service, field use and in labs. The RF attenuator, which is adjustable in steps of 5 dB, and the optional preamplifier ensure an optimum usable dynamic range.



## Condensed specifications

	R&S®FSL3, model .03	R&S®FSL3, model .13	R&S®FSL6, model .06	R&S®FSL6, model .16
Frequency range	9 kHz to 3 GHz	9 kHz to 3 GHz	9 kHz to 6 GHz	9 kHz to 6 GHz
Frequency accuracy	$1 \times 10^{-6}$			
With R&S®FSL-B4, OCXO	$1 \times 10^{-7}$			
Resolution bandwidths				
Standard	300 Hz to 10 MHz in 1/3 sequence			
With R&S®FSL-B7	10 Hz to 10 MHz in 1/3 sequence, additionally 1 Hz (FFT filter)			
Video bandwidths	10 Hz to 10 MHz			
I/Q demodulation bandwidth	20 MHz			
Phase noise	typ. $-103$ dBc(1 Hz) at 10 kHz from carrier, 1 GHz			
DANL				
With 300 Hz RBW	typ. $-117$ dBm			
With 1 Hz FFT RBW and pre-amplifier (options R&S®FSL-B7, -B22)	typ. $-152$ dBm			
TOI	10 dBm			
Detectors	pos/neg peak/auto peak, RMS, quasi-peak, average, sample			
Level measurement uncertainty	$<0.5$ dB			
Tracking generator	no	yes	no	yes
Frequency range		1 MHz to 3 GHz		1 MHz to 6 GHz
Output level		$-20$ dBm to 0 dBm		$-20$ dBm to 0 dBm

# The most extensive set of functions in its class

Channel power measurement (CP)	Highly configurable or standard-compliant predefined functions for precise power measurement of modulated signals
Adjacent channel power and multicarrier adjacent channel power measurement (ACP and MC-ACP)	
Fast ACP	Adjacent channel power measurement in time domain with channel filters, faster than normal ACP measurement
Time domain power measurement	For determining burst power
C/N, C/N <sub>0</sub>	Measures carrier-to-noise ratio relative to 1 Hz or the selected channel width
OBW	Measures occupied bandwidth at the press of a button
TOI measurement	Simplifies TOI measurement
Modulation depth measurement (AM%)	Determines modulation depth of AM signals at the press of a button
Complete range of detectors	RMS, quasi-peak, average, auto peak, pos peak, neg peak, sample
Selectable number of trace points	Improves repeatability of channel/adjacent channel power measurement, especially important for spurious measurements over a wide frequency range
Level units	dBm, dBμV, dBmV, dBμA, dBpW, V, W, A
Frequency counter	Fast determination of frequency at the accuracy of the internal or external reference, 1 Hz resolution with 50 ms measurement time
Noise and phase noise markers	dBm(1 Hz) and dBc(1 Hz) including all necessary correction factors
n-dB down marker	Fast filter bandwidth determination
RRC and channel filters	Channel power measurement in time domain and transient adjacent channel power
FFT filter 1 Hz/300 Hz to 30 kHz	Reduces measurement time for values such as spurious or near-carrier
LAN interface	Uses a remote control interface now standard in most PCs, eliminating the need to purchase a separate IEC/IEEE bus card
USB	Interface for USB memory sticks, e.g. for storing measurement results and plots or for easy firmware updates
Help function	Eliminates the need for manuals
<b>Optional</b>	
Gated sweep	For measuring the modulation spectra of burst signals
Power measurement with R&S®NRP power sensors	Increases level accuracy and eliminates the need for a separate power meter

# Fast and versatile in production

The R&S®FSL is ideal for fast, easy measurements during production. A quick check of the level and frequency is often all that's needed. The R&S®FSL's high speed of >80 sweeps/s in zero span, including remote output of data (or trace data), ensures high production throughput.

Even a simple level calibration can be streamlined and accelerated with the R&S®FSL's integrated complex measurement functions – a special multisummary marker measures different levels in the time domain in a single sweep. This eliminates reset and remote control overhead time. For fast synchronization or triggering, the R&S®FSL-B5 additional interfaces option – which includes a special trigger interface – can be added. The R&S®FSL also features the functionality needed to handle more complex tasks, for example a wide I/Q demodulation bandwidth.

Wireless interfaces such as WLAN are becoming widespread, even in mobile phones. This requires a greater number of modulation measurements on broadband signals during production. With its I/Q demodulation bandwidth of 20 MHz, the R&S®FSL is ready for the challenge.

In addition, the R&S®FSL offers the following functions:

- ◆ Fast ACP measurements in the time domain for the major mobile radio standards, with very good repeatability and short measurement times
- ◆ List mode: measurements with up to 300 analyzer settings in a single IEC/IEEE bus command
- ◆ Fast power measurement in the time domain using channel or RRC filters
- ◆ Fast frequency counter with 1 Hz resolution and measurement times <50 ms.

## Remote control via LAN or IEC/IEEE bus in line with SCPI

The standard remote interface is a 10/100BaseT LAN interface that provides significantly higher speeds than an IEC/IEEE bus for transferring large data volumes. It also offers considerable cost advantages over IEC/IEEE bus wiring. However, IEC/IEEE bus remote control can be added by installing the R&S®FSL-B10 option.

The command set of the R&S®FSL follows SCPI conventions and is thus largely compatible with the R&S®FSP and R&S®FSU analyzers.

The R&S®FSL is immune to reliability problems caused by mechanical switching of the RF attenuator, since its RF attenuator switching mechanism is completely electronic and thus not subject to wear.



### Input command

SENSE:LIST:POW

100MHz,-0dBm,10dB,10dB,NORM,1MHz,3MHz,434us,0,  
200MHz,-20dBm,10dB,0dB,NORM,30kHz,100kHz,1ms,0,  
300MHz,-20dBm,10dB,0dB,NORM,30kHz,100kHz,1ms,0;



### Output FSL

-28.3,  
-30.6,  
-38.1

*Remote control of the R&S® FSL via IEC/IEEE bus in list mode cuts down on measurement time.*

## Light and compact for on-site installation, maintenance and operation

- ◆ Easy portability due to small size and low weight
- ◆ Optional internal battery pack for cordless use; operating time can be expanded by simply replacing the battery pack
- ◆ Carrying bag with space for extra battery pack and accessories
- ◆ Connector for R&S® NRP power sensors; no separate power meter required
- ◆ Optional internal tracking generator for directional power measurements
- ◆ AM/FM audio demodulator (Mkr Demod) for interference identification
- ◆ Extensive functions for power measurements
- ◆ Storage of settings and measurement results internally or on USB memory stick




## Ideal for service

- ◆ Cost-effectiveness
- ◆ High measurement accuracy
- ◆ Extensive evaluation options
- ◆ Wide range of functions
- ◆ Built-in frequency counter
- ◆ Tracking generator for directional power measurements (for example with the R&S®ZRB2 or R&S®FSH-Z2 VSWR bridge)
- ◆ Easy output of measurement results to USB printer or file

## At home in every development lab

The R&S®FSL's excellent price/performance ratio makes it a must for every developer's lab bench, as indispensable as an oscilloscope or multimeter. Its range of functions and operation are largely identical with those of the R&S®FSU class of reference analyzers, simplifying the reproducible verification of measurements.

- ◆ Good RF performance at a low price
- ◆ Widest I/Q demodulation bandwidth in its class
- ◆ Quasi-peak detectors and EMC bandwidths of 200 Hz, 9 kHz, and 120 kHz for EMC checks during development and precompliance testing
- ◆ Tracking generator for directional power measurements (for example with the R&S®ZRB2 or R&S®FSH-Z2 VSWR bridge)
- ◆ High measurement accuracy
- ◆ Easy output of measurement results to USB printer, network printer or file
- ◆ Easy remote control via LAN
- ◆ Connection to Matlab

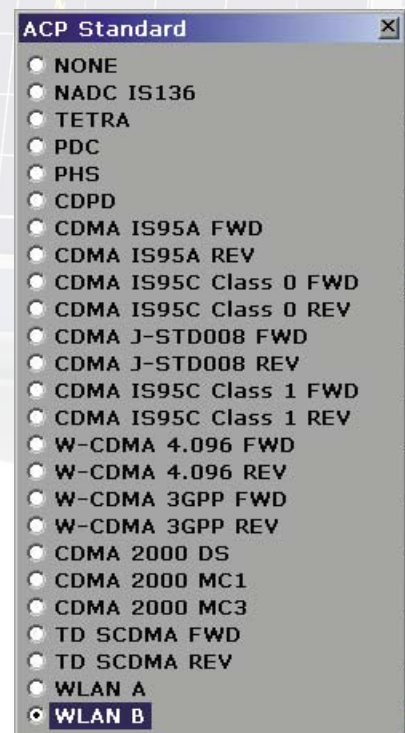

*The R&S® FSL's wide scope of functions also extends to channel/adjacent channel power measurements. To simplify use, many default settings can be selected by pressing a button.*




## Easy upgrades and a wide range of interfaces

The R&S®FSL has unique plug & play upgrade abilities. All options can be added without opening the instrument. This has several important advantages:

- ◆ No extra alignment after installation
- ◆ No recalibration
- ◆ No need to send in the instrument, thus negligible downtime
- ◆ No installation costs
- ◆ Easy installation of additional functions

The wide range of additional interfaces provided by the R&S®FSL-B5 option expands the application range of the R&S®FSL:

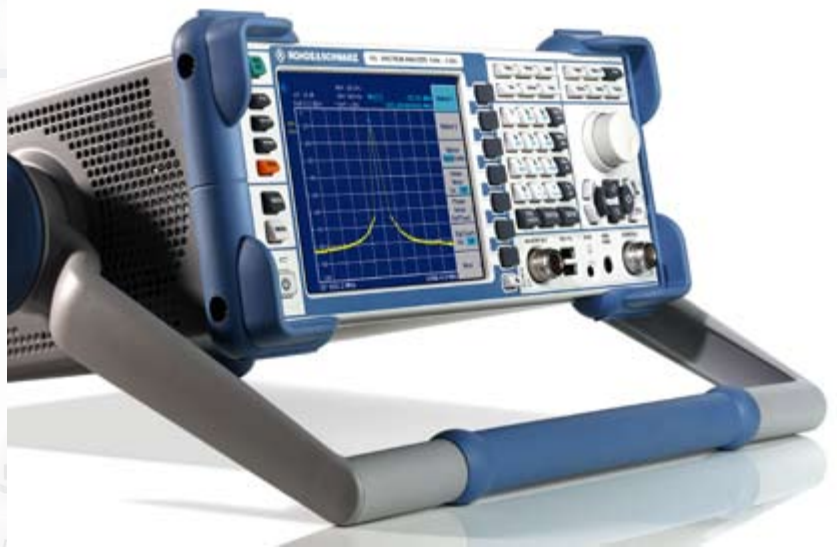

- ◆ IF output/video output for connecting further instruments
- ◆ 28 V, switchable for connecting noise sources
- ◆ Trigger interface for fast measurement on frequency lists
- ◆ Connector for an R&S®NRP power sensor (replaces the USB adapter for the R&S®NRP power sensors)



*Battery pack (R&S® FSL-B31)*

*DC power supply (R&S® FSL-B30)*

*IEC/IEEE (GPIB) bus interface (R&S® FSL-B10)*


*OCXO (R&S® FSL-B4)*

*Additional interfaces (R&S® FSL-B5)*

# The most extensive set of functions in its class


## Scalar network analysis

Models .13 and .16 of the R&S®FSL, which include a tracking generator, can quickly and easily measure frequency response, filters and attenuation. The n-dB down marker determines the 3 dB bandwidth of a bandpass filter at the press of a button, for example. The R&S®FSL measures return loss or matching by using an external VSWR bridge. Precision is enhanced by Through, Short and Open calibration methods.

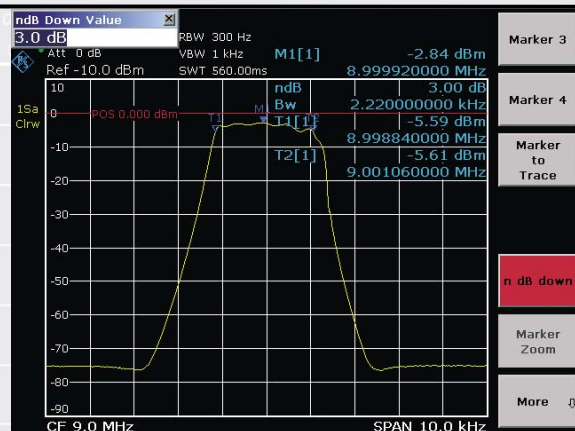


## Third order intercept (TOI)

The R&S®FSL can determine the TOI from the spectrum at the press of a button. It automatically detects the useful carriers and thus determines the intermodulation sidebands. The instrument's maximum dynamic range of 95 dB is high for its class. RF attenuation steps of 5 dB further enhance its usefulness.

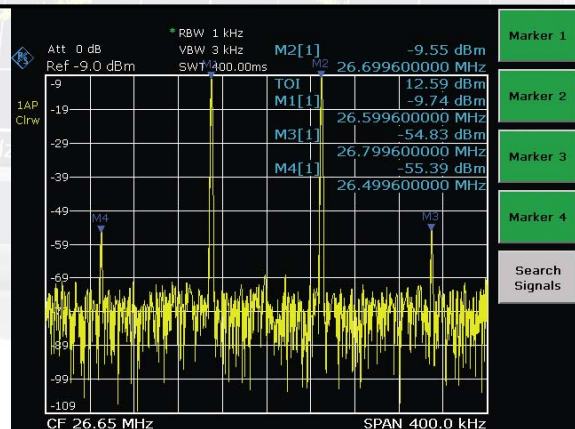

## Modulation depth measurement (AM%)


The R&S®FSL measures the modulation depth of an AM signal at the press of a button. The AM% marker function positions three markers – one each on the carrier, the upper sideband, and the lower sideband – and uses the sideband suppression to determine the modulation depth. The modulation depth of a two-tone signal can be determined selectively by predefining the modulation frequency, for example by starting with a 90 Hz sideband and then moving to the 150 Hz sideband of an ILS signal. The high linearity of <0.2 dB ensures a small absolute measurement error.

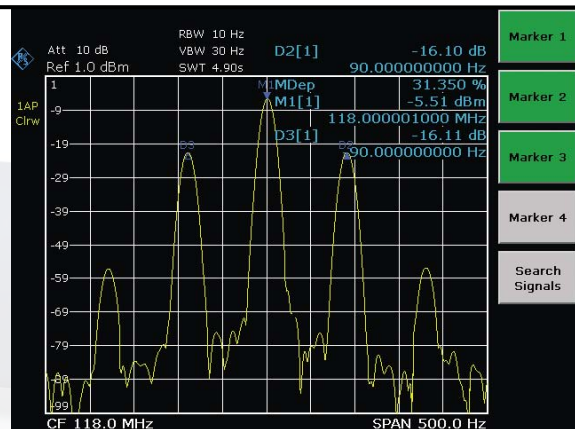




### Phase noise measurement with phase noise marker

The phase noise marker provides a quick measurement of the phase noise at a specific carrier offset. The result in dBc(1 Hz) includes all necessary corrections for the noise bandwidth of the filter, the detector used, and averaging. The phase noise of typ.  $-103$  dBc(1 Hz) at 10 kHz from the carrier is sufficient for a number of oscillator measuring tasks.

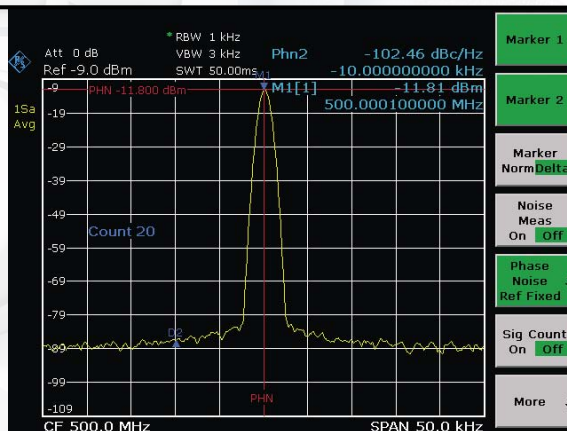

### Gated sweep

The R&S® FSL uses the gated sweep function for burst signal measurements. This function can display the modulation spectrum of a GSM signal or a burst WLAN signal (as shown in the example).

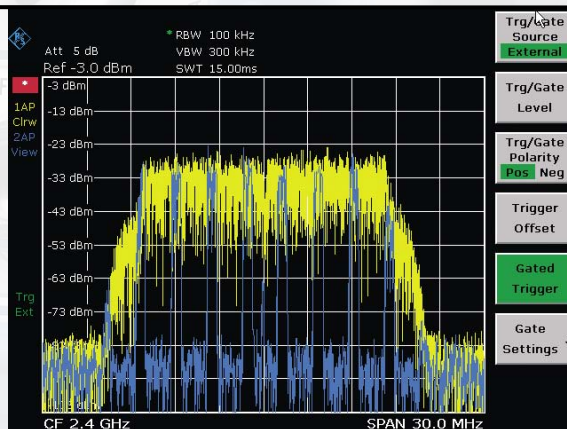







### Channel power measurements

Channel power measurements use integration to determine the power within a defined channel bandwidth. The full-featured RMS detector is used to measure the correct power independent of the signal, which ensures good repeatability and accuracy. The channel width can be defined by the user or selected from an extensive list of transmission standards.

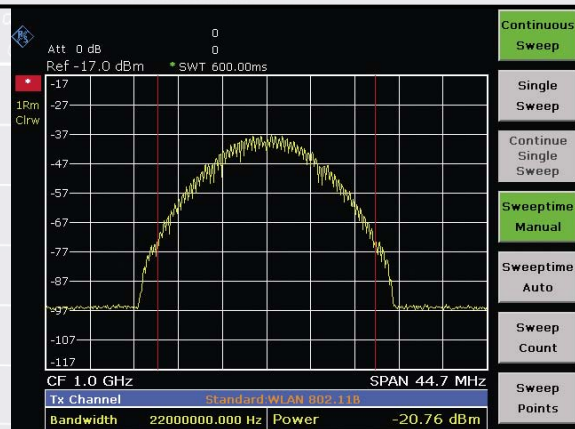


### Adjacent channel power (ACP, MC-ACP) measurements, for example cdmaOne

The ACP measurement function determines the adjacent channel power as an absolute value or relative to the useful carrier. The R&S® FSL offers predefined settings for many transmission standards, but parameters can also be user-defined, with channel widths and spacings for up to 12 channels and up to 3 adjacent channels.

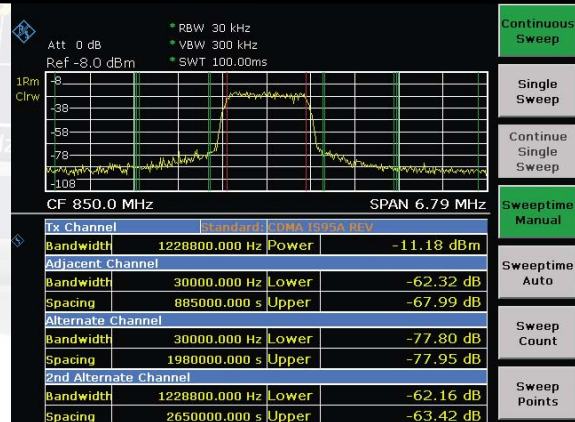


### Fast ACP in time domain with standard-compliant channel filters

The fast ACP function measures the adjacent channel power in the time domain using standard-compliant channel filters. This reduces the measurement time necessary for a specific repeatability by a factor of 10. It also provides an easy way to determine transient, time-dependent adjacent channel power.

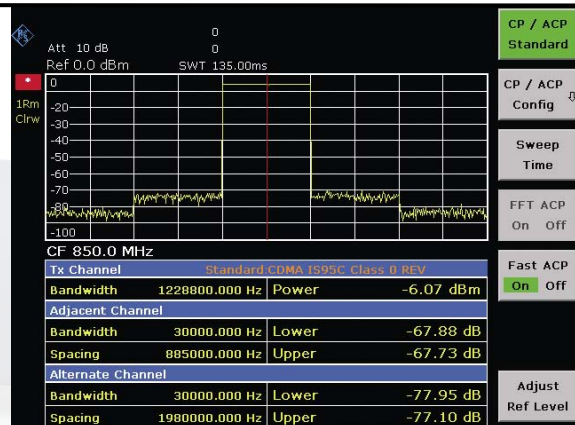


### Burst power measurement: time domain power

This feature allows the burst power to be measured in the time domain. Display lines delimit the evaluation area, thus making it possible to determine the power during the 147 useful bits of a GSM burst, for example.

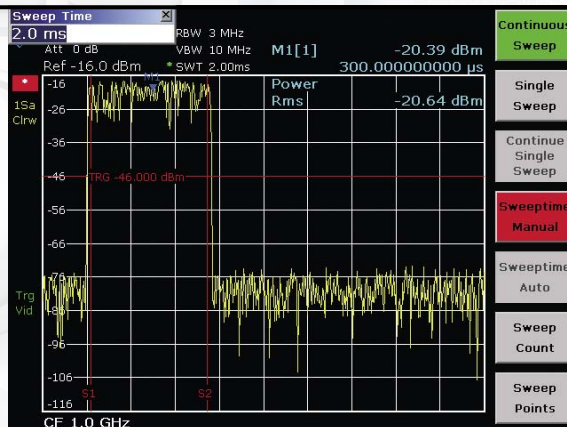

### Occupied Bandwidth (OBW)

OBW is a measure of the bandwidth occupied by the signal. The R&S®FSL determines this value from the total power within the span and the individual external power values, for example 0.5% of the power. The remaining value then corresponds to 99% of the bandwidth. The fully synchronous frequency sweep and the high number of trace points make this measurement very precise.

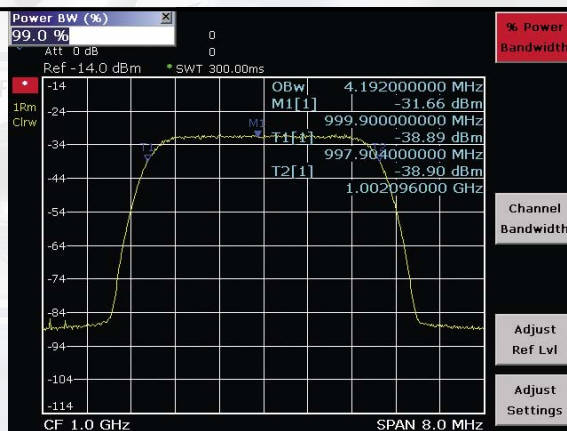

# Benefit from the advantages of networking

## Versatile documentation and networking capabilities

The Windows XP Embedded operating system coupled with a wide variety of interfaces makes it easy to insert measurement results into documentation. Simply save the screen contents as a BMP or WMF file and import the file into your word processing system. To process trace data, save it as an ASCII file (CSV format), together with the main instrument settings.


## Make use of the advantages offered by networking

The standard LAN interface opens up versatile networking capabilities:

- ◆ Link to standard network (Ethernet 10/100BaseT)
- ◆ Running under Windows XP Embedded, the R&S®FSL can be configured for network operation. Applications such as data output to a central network printer or saving results on a central server can easily be implemented. The R&S®FSL can thus be optimally matched to any work environment
- ◆ You can import screen contents directly into MS Word for Windows or, by using an MS Excel macro, into your documentation programs and thus immediately create data sheets for your products or documents for quality assurance

The standard USB host interface allows functions such as the following:

- ◆ Quick firmware update from a USB flash memory stick or a USB CD-ROM drive
- ◆ Connection of PC peripheral devices (mouse, keyboard)
- ◆ Simple file transfer, including large volumes of data via a USB flash memory stick
- ◆ Remote control by Ethernet is even simpler with the built-in VXI11 compatibility: It links your application to the TCP/IP protocol and acts like an IEC/IEEE bus driver. VXI11 is supported by commercial VISA libraries. The R&S®FSL can be programmed and remote-controlled via this interface just like on the familiar IEC/IEEE bus

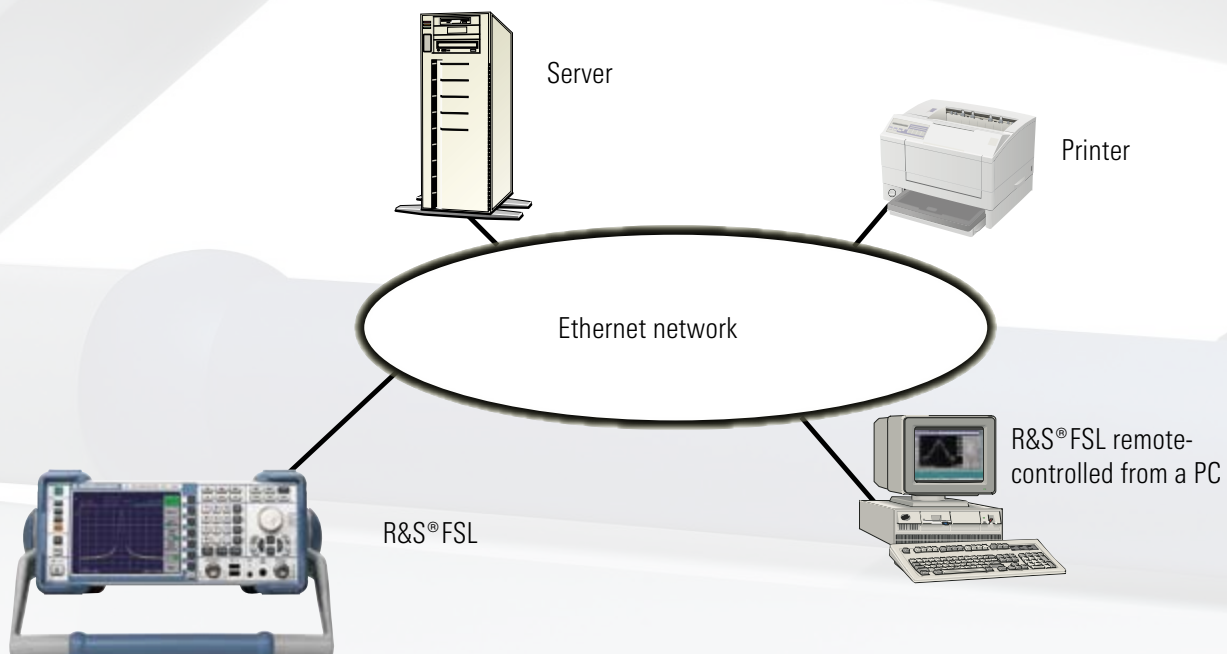



## Ordering information

Order designation	Type	Order No.
Spectrum Analyzer, 9 kHz to 3 GHz	R&S®FSL3	1300.2502.03
Spectrum Analyzer, 9 kHz to 3 GHz, with tracking generator	R&S®FSL3	1300.2502.13
Spectrum Analyzer, 9 kHz to 6 GHz	R&S®FSL6	1300.2502.06
Spectrum Analyzer, 9 kHz to 6 GHz, with tracking generator	R&S®FSL6	1300.2502.16

## Options

Order designation	Type	Order No.	Comments
OCXO Reference Frequency	R&S®FSL-B4	1300.6008.02	
Additional Interfaces	R&S®FSL-B5	1300.6108.02	video out, IF out, noise source control, AUX port, R&S®NRP power sensor
Narrow Resolution Filters	R&S®FSL-B7	1300.5601.02	
Gated Sweep	R&S®FSL-B8	1300.5701.02	
GPIB Interface	R&S®FSL-B10	1300.6208.02	
RF Preamplifier	R&S®FSL-B22	1300.5953.02	
DC Power Supply	R&S®FSL-B30	1300.6308.02	
NiMH Battery Pack	R&S®FSL-B31	1300.6408.02	requires R&S®FSL-B30
<b>Firmware expansions/options</b>			
Power Sensor Support	R&S®FSL-K9	1301.9530.02	requires R&S®FSL-B5 or R&S®NRP-Z3/4

## Recommended extras

Order designation	Type	Order No.
19" Rackmount Adapter	R&S®ZZA-S334	1109.4487.00
Soft carrying bag	R&S®FSL-Z3	1300.5401.00
Additional Charger Unit	R&S®FSL-Z4	1300.5430.02
Matching Pad 75 $\Omega$ , L section	R&S®RAM	0358.5414.02
Matching Pad 75 $\Omega$ , series resistor 25 $\Omega$	R&S®RAZ	0358.5714.02
Matching Pad 75 $\Omega$ , L section, N to BNC	R&S®FSH-Z38	1300.7740.02
SWR Bridge 5 MHz to 3 GHz	R&S®ZRB2	0373.9017.52
SWR Bridge 40 kHz to 4 GHz	R&S®ZRC	1039.9492.52
SWR Bridge 10 MHz to 3 GHz (incl. open, short, load calibration standards)	R&S®FSH-Z2	1145.5767.02

## Power sensors supported by R&S®FSL-K9

Order designation	Type	Order No.
Average Power Sensor 10 MHz to 8 GHz, 200 mW	R&S®NRP-Z11	1138.3004.02
Average Power Sensor 10 MHz to 18 GHz, 200 mW	R&S®NRP-Z21	1137.6000.02
Average Power Sensor 10 MHz to 18 GHz, 2 W	R&S®NRP-Z22	1137.7506.02
Average Power Sensor 10 MHz to 18 GHz, 15 W	R&S®NRP-Z23	1137.8002.02
Average Power Sensor 10 MHz to 18 GHz, 30 W	R&S®NRP-Z24	1137.8502.02
Average Power Sensor 9 kHz to 6 GHz, 200 mW	R&S®NRP-Z91	1168.8004.02
Thermal Power Sensor 0 Hz to 18 GHz, 100 mW	R&S®NRP-Z51	1138.0005.02
Thermal Power Sensor 0 Hz to 40 GHz, 100 mW	R&S®NRP-Z55	1138.2008.02



For specifications, see PD 0758.2790.22  
and [www.rohde-schwarz.com](http://www.rohde-schwarz.com)  
(search term: FSL)



**ROHDE & SCHWARZ**

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

Europe: Tel. +49 1805 12 4242, e-mail: [customersupport@rohde-schwarz.com](mailto:customersupport@rohde-schwarz.com) · North America: Tel. +1 410-910-7988, e-mail: [customer.support@rsa.rohde-schwarz.com](mailto:customer.support@rsa.rohde-schwarz.com)  
Asia: Tel. +65 68463710, e-mail: [customersupport.asia@rohde-schwarz.com](mailto:customersupport.asia@rohde-schwarz.com)