

# ClearCurve® Rugged Drop, Indoor/Outdoor, Tight-Buffered Cable 1 F, Single-mode (OS2)



Part Number:  
001U2F-31531-29

## Features and Benefits

### Flexible, robust cable

Solves unique challenges associated with MDU deployments

### Self-bend-limiting design



Can be directly stapled and routed around tight corners

### Outperforms typical copper cables (RG-6 Coaxial)

Higher bandwidth, lighter weight, smaller OD and bend-radius

### Waterblocking technology

Allows efficient and craft-friendly cable preparation

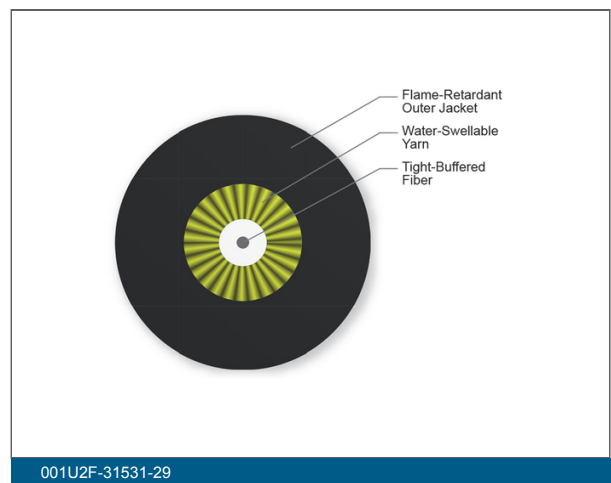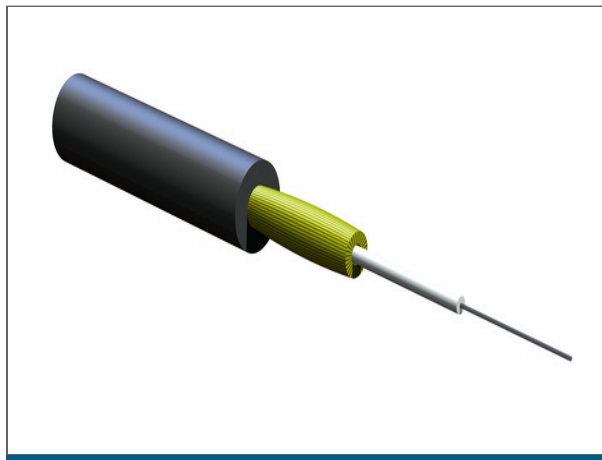

# ClearCurve® Rugged Drop, Indoor/Outdoor, Tight-Buffered Cable 1 F, Single-mode (OS2)



## Specifications

Mechanical Specifications	
Max. Tensile Strength, Long-Term	150 N
Max. Tensile Strength, Short-Term	450 N
Min. Bend Radius Installation	4 mm (0.16 in)
Min. Bend Radius Operation	4 mm (0.16 in)
Nominal Outer Diameter	4.8 mm (0.19 in)

Cable Design	
Fiber Count	1
Outer Jacket Color	Black
Outer Jacket Material	Flame-Retardant, UV-Resistant
Tensile Strength Elements and/or Armoring - Layer 1	Water-Swellable Strength Yarns
Fiber Coloring	White
Flame Rating	Riser (OFNR)

Environmental Conditions	
Temperature Range, Installation	-5 °C to 60 °C (23 °F to 140 °F )
Temperature Range, Storage	-40 °C to 70 °C (-40 °F to 158 °F )
Temperature Range, Operation	-40 °C to 70 °C (-40 °F to 158 °F )

General Specifications	
Environment	Indoor/Outdoor
Cable Type	Drop
Product Type	Dielectric
Fiber Category	Single-mode (OS2)
Flame Rating	Riser (OFNR)

# ClearCurve® Rugged Drop, Indoor/Outdoor, Tight-Buffered Cable 1 F, Single-mode (OS2)

CORNING

## General Specifications

Application	Lashed Aerial , Direct Buried , Duct , General Purpose Horizontal
-------------	-------------------------------------------------------------------

## Ordering Information

Weight	21 kg/km
--------	----------

## Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Approvals and Listings	National Electrical Code® (NEC®) OFNR, CSA OFN FT-4
Common Installations	MDU drop cable applications from last terminal to and within living unit including outdoor and indoor vertical riser and general-purpose horizontal according to NEC Article 770
Design and Test Criteria	ANSI/ICEA S-104-696, Telcordia GR-409

## Optical Characteristics

Fiber Code	U
Fiber Name	ClearCurve® ZBL
Fiber Type	Single-mode
Performance Option Code	01
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km
Typical Attenuation	0.36 / 0.36 / 0.20
Wavelengths	1310 nm / 1383 nm / 1550 nm
Fiber Category	G.657.B3/G.652.D



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States  
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2020 Corning Optical Communications. All rights reserved.