


FUNCTION GENERATORS & WAVEFORM SYNTHESIZERS

Synthesizer/Function Generator

HP 3335A, 3336C

- 200 Hz to 81 MHz
- High spectral purity
- Precision amplitude control
- 1 MHz resolution

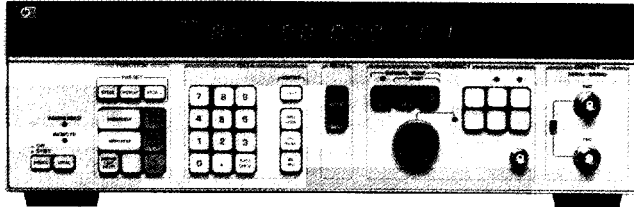

HP 3335A

HP 3335A Synthesizer/Level Generator

The HP 3335A Synthesizer/Level Generator has performance characteristics that make it ideally suited for the telecommunications industry as well as for traditional synthesizer applications, including testing of Frequency Division Multiplex (FDM) equipment and research and development and production testing of communications systems.

Precision Amplitude, Frequency

The HP 3335A incorporates a state-of-the-art attenuator with accuracies of up to ± 0.025 dB over the 81 MHz frequency range. Frequency stability up to $\pm 1 \times 10^{-6}$ /day is provided by an internal temperature-controlled oscillator.

Frequency Sweep, Tracking Generator

The HP 3335A combines the frequency, accuracy and stability of a synthesizer with the time-saving convenience of a digital sweeper. In addition, the HP 3335A operates as a tracking generator with the HP 3746A/B Selective Level Measuring Set (SLMS) or the HP 3586A/B/C Selective Level Meter for automatic or semi-automatic testing of FDM systems.

Specifications

Contact your local HP Sales Office for more information including a data sheet with complete specifications.

Frequency

- Standard range:** 200 Hz to 81 MHz **Resolution:** .001 Hz
Option 002/004 range: 75 Ω , 200 Hz to 81 MHz; 124 Ω , 10 kHz to 10 MHz; 135/150 Ω , 10 kHz to 2 MHz
Option 003 range: 75 Ω , 200 Hz to 81 MHz; 150 Ω , 10 kHz to 2 MHz
Option 001: (high stability frequency reference)
 Stability, long term: $\pm 1 \times 10^{-10}$ /day; $\pm 1 \times 10^{-7}$ /month
 Aging rate: $\pm 5 \times 10^{-8}$ /day; $\pm 2 \times 10^{-8}$ /month

Spectral purity

- Harmonic distortion:** 200 Hz to 10 MHz: < -45 dBc; 10 MHz – 80 MHz; < -40 dBc
Phase noise: (30 kHz band, excluding ± 1 Hz, centered on the carrier): 9.9 MHz: < -63 dBc; 20 MHz; < -70 dBc; 40 MHz; < -64 dBc; 80 MHz: < -58 dBc
Spurious: Nonharmonically related signals: the greater of -75 dBc or -125 dBm (50/75 Ω), -97 dBm (124 Ω), -68 dBm (135/150 Ω)

Amplitude range


- -88.74 dBm to $+13.01$ dBm depending on option and impedance.
Resolution: 0.01 dB
Absolute level accuracy (Max. output at 100 kHz, 10° C to 35° C): 50/75 Ω ± 0.05 dB; 124/135/150 Ω : ± 0.1 dB.
Flatness (Relative to 100 kHz, full amplitude): 50/75 Ω : 1 kHz to 25 MHz: ± 0.07 dB, 200 Hz to 80 MHz: ± 0.15 dB; 124 Ω : 50 kHz to 10 MHz: ± 0.15 dB, 10 kHz to 10 MHz: ± 0.4 dB; 135/150 Ω : 10 kHz to 2 MHz: ± 0.18 dB.

Ordering Information

	Price
HP 3335A Synthesizer/Level Generator	\$12,800
Opt 001 High-stability reference $\pm 5 \times 10^{-10}$ /day	+ \$1,280
Opt 002 Connector (75/124/135 Ω)	+ \$575
Opt 003 Connector (75/150 Ω)	+ \$365
Opt 004 Connector (75 Ω , miniature WECO on 124/135 Ω)	+ \$575
Opt C01 Rack Slide Mount	

Contact HP

- 10 Hz to 20.999 MHz
- 11 digit resolution
- Excellent amplitude accuracy
- 1 MHz resolution

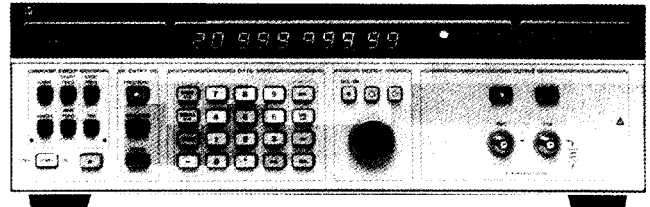

HP 3336C

HP 3336C Synthesizer/Function Generator

The HP 3336C is designed for traditional synthesizer applications as well as R&D and production testing of systems or components. It features precision level control, high spectral purity, optional frequency stability of $\pm 5 \times 10^{-6}$ /week, internal frequency sweep and numerous other user conveniences.

Precision Frequency Measurements, Amplitude Accuracy

A single loop fractional-N synthesis technique allows synthesizer accuracy with 11 digits of resolution, with completely phase continuous frequency sweep over any of the instruments' frequency ranges. HP attenuator technology coupled with custom designs in leveling loops and thermal converters produce amplitude accuracies of up to ± 0.05 dB. The fast leveling loop makes extremely flat sweeps possible at high sweep speeds.

Models HP 3336A and B are also available for the telecommunications industry (see page 599).

Specifications

Contact your local HP Sales Office for more information including a data sheet with complete specifications.

Frequency

- Range:** 10 Hz to 20.999 999999 MHz
Resolution: 1 μ Hz for frequencies < 100 kHz, 1 MHz for frequencies ≥ 100 kHz
Aging rate: $\pm 5 \times 10^{-6}$ /year (20° to 30° C)

Amplitude

- Range:** 50 Ω : -71.23 to $+8.76$ dBm; 75 Ω : -72.99 to 7.00 dBm
Absolute accuracy: ± 0.05 dB, 20° to 30° C (for the top 9.99 dB of amplitude range at 10 kHz), ± 0.08 dB, 0° to 55° C
Flatness: 50/75 Ω , ± 0.1 dB (± 0.07 dB with Option 005) referenced to 10 kHz

Amplitude modulation

- Modulation depth:** 0 to 100%
Modulation frequency range: 50 Hz to 50 kHz

Phase modulation

- Range:** 0° to $\pm 850^\circ$
Linearity: $\pm 0.5\%$ from best fit straight line
Modulation frequency range: dc to 5 kHz

Frequency sweep

- Sweep time: Linear; 0.01 s to 99.99 s. Single Log: 2 s to 99.99 s
 Continuous Log: 0.1 s to 99.99 s

Dimensions

- Size:** 132.6 mm H \times 425.5 mm W \times 497.8 mm D (5.2 in \times 16.8 in \times 19.6 in)
Weight: Net, 10 kg. (22 lb); shipping, 15.5 kg. (34 lb)

Ordering Information

HP 3336C Synthesizer/Level Generator	Price
Opt 004 High Stability Frequency Reference	\$5,640
Opt 005 High Accuracy Attenuator	+ \$685
Opt 907 Front Handle Kit	+ \$685
Opt 908 Rack Flange Kit	+ \$58
Opt 909 Rack Flange and Handle Kit	+ \$34
Opt W30 Extended Repair Service. See page 671.	+ \$84
	+ \$130