

Handheld Oscilloscope Models OX7202^{III} & OX7204^{III} 200MHz

NEW!



Features

- 5 complementary tools in a single instrument: Oscilloscope, FFT Analyzer, Multimeter/Wattmeter, Harmonic Analyzer on voltage/current/power and Recorder
- Sampling rate 2.5GS/s in one-shot mode and 100GS/s in ETS mode (repetitive signals)
- 2 or 4 isolated measurement channels (600V CAT III) and up to 8 traces on screen
- 2 or 4 independent TRMS digital multimeters (8000 counts, 200kHz)
- LCD touch screen and Windows-like menus on screen
- Probix “plug & play” input terminals and smart sensors
- Standard “real-time” FFT analysis and calculation functions on channels
- Multi-interface communication connectors: RS232, Centronics and Ethernet
- Memory depth of up to 50,000 points per channel (Oscilloscope and Recorder modes)

SPECIFICATIONS


MODELS	OX7202 ^{III}	OX7204 ^{III}
INTERFACE		
Screen Specifications	Color 5.7" LCD (115 x 86mm) 320 x 240 – CCFL backlighting	
Display Mode	Vectors with interpolation	
No. of Traces on Screen	Four traces and four references – split screen and full screen modes (tracing zone 110 x 74)	
Front Panel Control	32 direct shortcuts	
Screen Control	Touch screen – “Windows-like” menus and graphic commands	
VERTICAL		
Vertical Sensitivity	16 ranges from 2.5mV – 200V/div and up to 156µV/div in verticle zoom mode (12-bit converter) – Accuracy ± 1% of Reading	
Bandwidth	200MHz	
Channels	Two isolated channels	Four isolated channels
Accuracy	±0.1% of Reading	
Input Impedance	1MΩ ± 0.5%	
Max Input Voltage	600Vdc, 600Vrms, 850Vpk (DC + peak AC at 1kHz) without 10/1 probe 1000Vrms with 10/1 probe derating -20 dB/decade from 100kHz to 200MHz	
Vertical Zoom	x5 maximum	
HORIZONTAL		
Time Base Speed	35 ranges from 1ns/div to 200s/div	
Accuracy	accuracy ± 0.1% - Roll mode from 100 ms to 200 s/div	
Horizontal Zoom	x100 maximum	
DIGITAL MEMORY		
Max. Sampling Speed	100GS/s in ETS – 2.5GS/s in Single Shot Mode on each channel	
Vertical Resolution	12 bits	
Memory Capacity per Channel	“TRC” approx. 10kB, “TXT” approx. 20kB	
User Memory	2MB	
Other Modes	Envelope mode (Factors from 2 to 64)	
XY Mode	Between two from the four traces – math functions and cursors	
OTHER FUNCTIONS		
Autoset	Complete autoset < 3s with recognition of channels, Frequency >30Hz	
Trigger Mode	Automatic Triggered, Single shot, Auto Level 50%	
FT Analyzer & Math Functions	FT, +, -, x, / – Editor of mathematical functions	
Cursors	Two or three cursors: V and T simultaneous or Phase Resolution 12 bits, display four digits	
Power Source	Rechargeable 9V 3.8Ah battery (included)	
Battery Life	Four hour operation when fully charged	
Communication	Ethernet, RS-232, Web Server	

- Triggering on measurement thresholds in Oscilloscope and Multimeter modes
- NEW – Adapter for measuring up to 700VAC RMS 1000VDC in meter mode
- NEW – Web Server (FTP server/client) with cursors and automatic measurements
- NEW – MiniFlex[®] sensors, powered by the instrument
- NEW – Power measurement option included for your power measurements
- NEW – Adapter for measuring up to 700VAC RMS 1000VDC in meter mode




Model OX7202^{III} Kit


Four Tools in One!

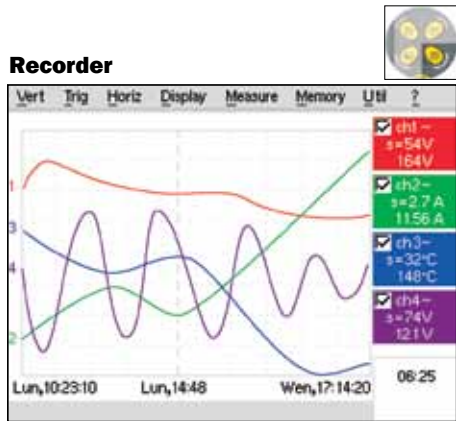


The OX^{III} Series supports a great variety of sensors (voltage, current, temperature, 0 to 10V, 4 to 20mA, etc) and displays them in their original physical scale and units.

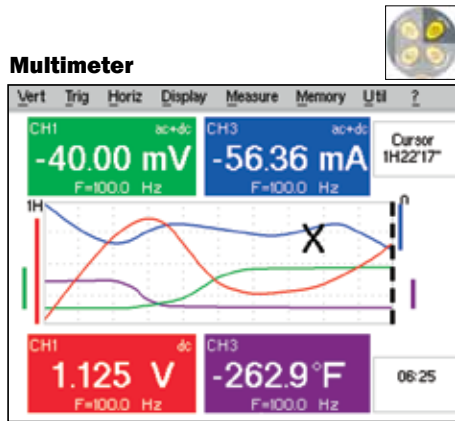

Automatic recording of the measured values are stored in memory on all active channels allowing review of periods lasting from five minutes to 24 hours.

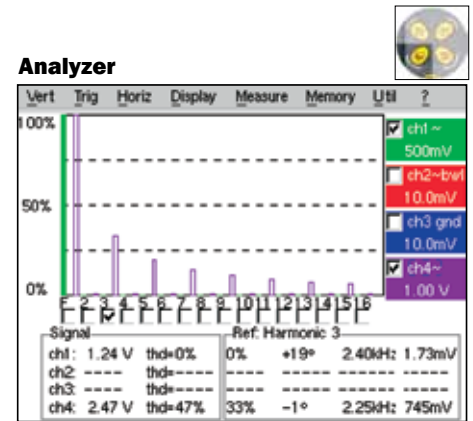

Harmonic analysis results are displayed in bargraph form.

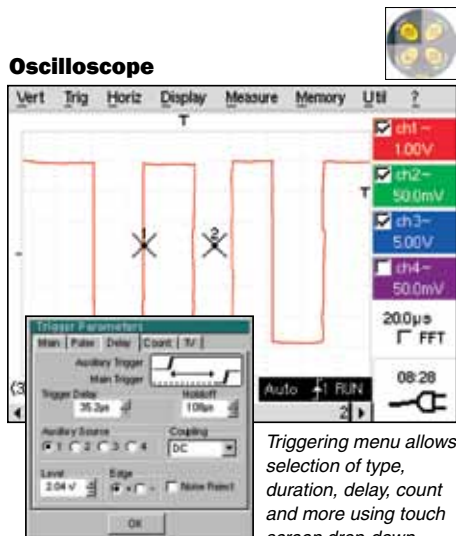

Triggering menu allows selection of type, duration, delay, count and more using touch screen drop-down menu.

Probe accessory options for Models OX7102^{III} & OX7104^{III}

AmpFlex[®] 0.5A to 3kA, 200kHz
Catalog #2124.91



MiniFlex[®] 0.5A to 300A, 3MHz
Catalog #2124.92



PROBIX PRHX5 50Ω Adapter
Catalog #2124.75



CATALOG NO.	DESCRIPTION
2124.58	Handheld Oscilloscope Model OX7102 ^{III} 100MHz
2124.59	Handheld Oscilloscope Model OX7202 ^{III} 200MHz
2124.67	Handheld Oscilloscope Model OX7104 ^{III} 100MHz
2124.68	Handheld Oscilloscope Model OX7204 ^{III} 200MHz
Accessories (Optional)	
2124.75	PROBIX PRHX5, 50Ω Adapter
2124.91	AmpFlex [®] 0.5A to 3kA, 200kHz for use with Oscilloscope OX Series
2124.92	MiniFlex [®] 0.5A to 300A, 3MHz for use with Oscilloscope OX Series